

G3002 3 Lever Mortice Roller Bolt Sashlock






Description	3 Lever mortice roller bolt sashlock for use on internal wooden hinged doors providing a standard level of security. CE Marked door lock Fire rated to BS EN 1634-1:2000 & Performance rated to BS EN 12209. Roller bolt operated by lever handle from either side. Deadbolt operated by key from either side. Supplied with 2 keys, striker plate and fixing screws. Finishes stainless steel (SS) or satin brass (SB). Other finishes available. 100 standard differs.
Operation	Roller bolt operated by lever handle from either side. Deadbolt operated by key from either side
Case	76mm and 101mm sizes pierced to accept 38mm centre horizontally and 38mm centre diagonally opposed bolt through fixing furniture; 63mm size pierced diagonally

- centre diagonally opposed bolt through fixing furniture; 63mm size pierced diagonally only
- Striker Plate Type A
- Latchbolt Brass, roller bolt to suit either hand. Projection 12mm

Deadbolt	Brass. Throw 16mm
Follower	Brass, to suit 8mm square spindle. One-way action. Sprung to suit sprung lever handle furniture. For unsprung lever handle furniture heavy duty springing should be specified
Differs	100 standard differs numbered 301-400
Rebate Units To Suit	RB/G3051-13mm RB/G3052-19mm RB/G3053-25mm
Box	DUSTBOX1 - Sold Separately
A Lock Case	63mm, 76mm, 101mm
B Backset	45mm, 57mm, 82mm
0.0	

C Centres 57mm, 57mm, 57mm

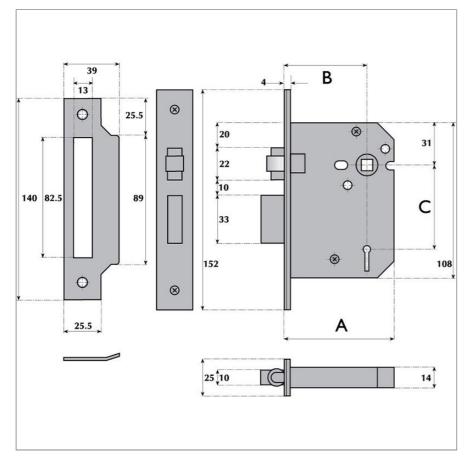

Guardian Lock & Engineering Co Ltd. Imperial Works, Wednesfield Road, Willenhall, West Midlands, WV13 1AL, United Kingdom.

+44(0)1902 635 964 | sales@imperiallocks.co.uk