

SC30063 Lever Mortice Sliding Door Lock





Description 3 Lever standard case mortice sliding door lock for use on internal wooden sliding doors providing a standard level of security. CE Marked door lock Fire rated to BS EN 1634-1:2000 & Performance rated to BS EN 12209. Bolt operated by key from either side. Supplied with 2 keys, striker plate and fixing screws. Finishes stainless steel (SS) or satin brass (SB). Other finishes available. 100 standard differs.

Operation Bolt operated by key from either side


Striker Plate Type C

- Deadbolt Brass, expanded claw. Throw 16mm
- Differs100 standard differs numbered 301-400
- Rebate DL/G3051-13mm DL/G3052-19mm DL/G3053-25mm

Units To Suit



B Backset 57mm, 82mm

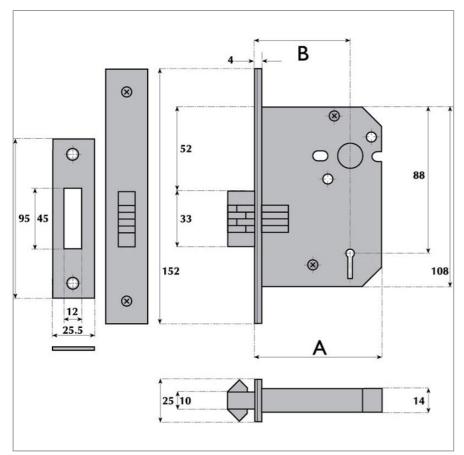

Guardian Lock & Engineering Co Ltd. Imperial Works, Wednesfield Road, Willenhall, West Midlands, WV13 1AL, United Kingdom.

+44(0)1902 635 964 | sales@imperiallocks.co.uk