

G50045 Lever Mortice Deadlock















Description

5 Lever mortice deadlock for use on external wooden hinged doors providing a high level of security. CE Marked door lock Fire rated to BS EN 1634-1:2000 & Performance rated to BS EN 12209. Deadbolt operated by key from either side. Supplied with 2 keys, striker plate and fixing screws. Finishes stainless steel (SS) or satin brass (SB). Other finishes available. 200 standard differs.

Operation

Deadbolt operated by key from either side

Striker Plate

Box, Type M

Deadbolt

Brass, with two hardened steel rollers. Throw 16mm

Differs

200 standard differs numbered 001-200


Rebate Units

To Suit

G3054-13mm G3055-19mm G3056-25mm

A Lock Case 63mm, 76mm, 101mm

B Backset 45mm, 57mm, 82mm

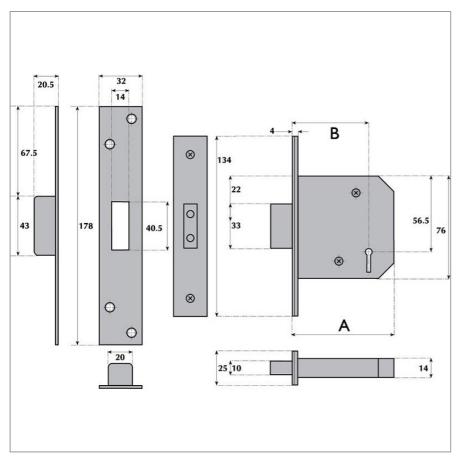

Guardian Lock & Engineering Co Ltd. Imperial Works, Wednesfield Road, Willenhall, West Midlands, WV13 1AL, United Kingdom.

+44(0)1902 635 964 | sales@imperiallocks.co.uk