



G5007 5 Lever Mortice Escape Deadlock



Description	5 Lever mortice escape deadlock for use on external wooden hinged doors providing a high level of security. CE Marked door lock Fire rated to BS EN 1634-1:2000 & Performance rated to BS EN 12209. In standard one-way action, deadbolt thrown or withdrawn by key from either side and withdrawn by lever handle or turn knob from inside Two-way action deadbolt thrown or withdrawn by key or handle from either side. Supplied with 2 keys, striker plate and fixing screws. Finishes stainless steel (SS) or satin brass (SB). Other finishes available. 150 standard differs.
Operation	In standard one-way action, deadbolt thrown or withdrawn by key from either side and withdrawn by lever handle or turn knob from inside Two-way action deadbolt thrown or withdrawn by key or handle from either side
Striker Plate	Box, Type M
Deadbolt	Brass, with two hardened steel rollers. Throw 13mm
Follower	

Brass, to suit 8mm square spindle. One-way action as standard Two-way available on request


Differs 150 standard differs

Rebate Units To Suit DL/G3051-13mm DL/G3052-19mm DL/G3053-25mm

A Lock Case 76mm, 101mm

B Backset 57mm, 82mm

C Centres 57mm, 57mm

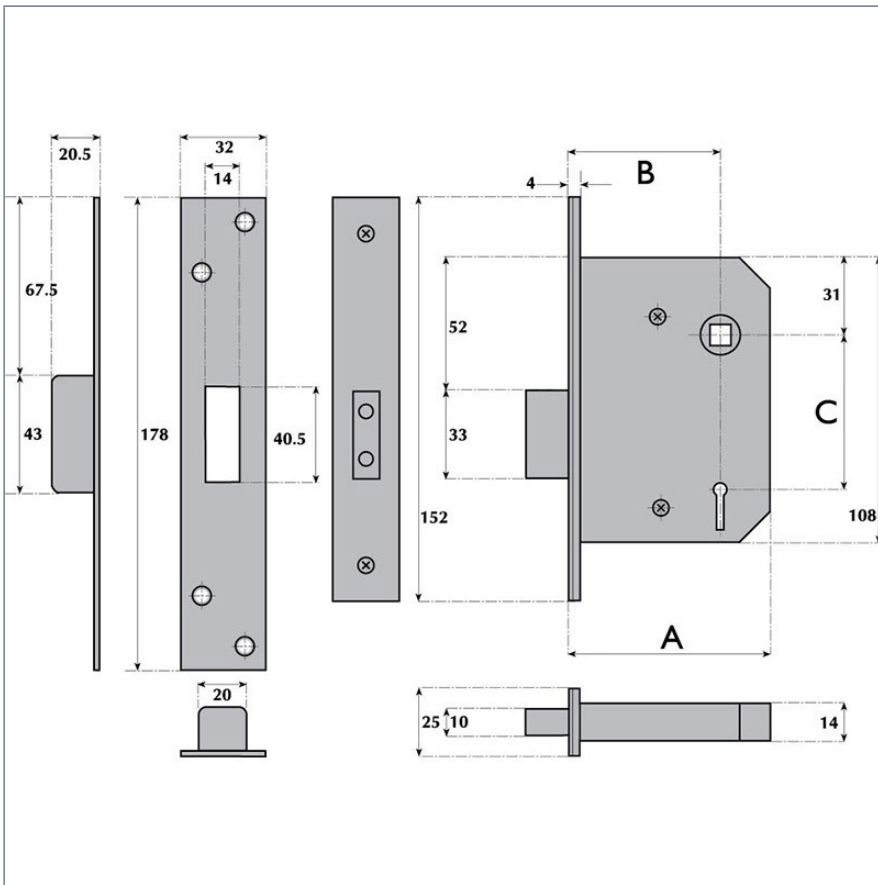

Guardian Lock & Engineering Co Ltd. Imperial Works, Wednesfield Road, Willenhall, West Midlands, WV13 1AL, United Kingdom.

+44(0)1902 635 964 | sales@imperiallocks.co.uk