

## G5011 5 Lever Horizontal Mortice Lock





**Description** 

5 Lever horizontal mortice lock for use on external wooden hinged doors providing a high level of security. CE Marked door lock Fire rated to BS EN 1634-1:2000 & Performance rated to BS EN 12209. Latchbolt operated by knob from either side Deadbolt operated by key from either side. Supplied with 2 keys, striker plate and fixing screws. Finishes stainless steel (SS) or satin brass (SB). Other finishes available. 200 standard differs.

Operation

Latchbolt operated by knob from either side Deadbolt operated by key from either

side

Case

Pierced to accept 38mm centre horizontally opposed bolt through fixing furniture

Striker Plate

Type B with dust box DB1

Latchbolt

Brass, reversible. Projection 12mm

**Deadbolt** 

Brass, with two hardened steel rollers. Throw 16mm

**Follower** Brass, to suit 8mm square spindle Two-way action


**Differs** 200 standard differs numbered 001-200

Rebate Units To Suit G3057-13mm G3058-19mm G3059-25mm

A Lock Case 127mm

B Backset 45mm

C Centres 57mm

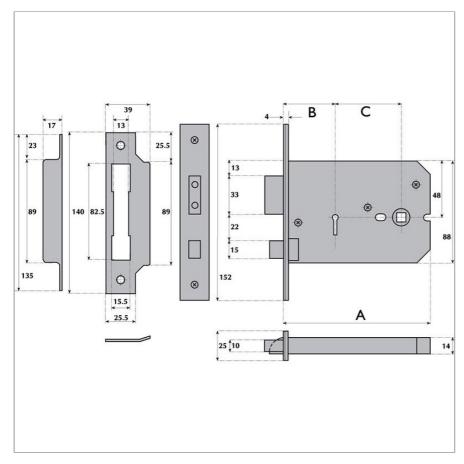

Guardian Lock & Engineering Co Ltd. Imperial Works, Wednesfield Road, Willenhall, West Midlands, WV13 1AL, United Kingdom.

+44(0)1902 635 964 | sales@imperiallocks.co.uk