




## G5050 BS3621 British Standard 5 Lever Mortice Sashlock



<b>Description</b>	Kitemarked BS3621 British standard 5 Lever mortice sashlock for use on external wooden hinged doors providing the maximum level of security. CE Marked door lock Fire rated to BS EN 1634-1:2000 & Performance rated to BS EN 12209. Latchbolt operated by lever handle from either side. Deadbolt operated by key from either side. Supplied with 2 keys, striker plate and fixing screws. Finishes stainless steel (SS) or satin brass (SB). Other finishes available. 1000 differs.
<b>Operation</b>	Latchbolt operated by lever handle from either side. Deadbolt operated by key from either side
<b>Case</b>	Hardened steel. Pierced to accept 38mm centre horizontally opposed bolt through fixing furniture
<b>Striker Plate</b>	Box, Type K
<b>Latchbolt</b>	Brass, easily reversible. Projection 12mm

<b>Deadbolt</b>	Brass, with two hardened steel rollers. Throw 20mm
<b>Follower</b>	Brass, to suit 8mm square spindle. One-way action Heavier springing available
<b>Differs</b>	1000 unnumbered
<b>Rebate Units To Suit</b>	G3067-13mm G3068-19mm G3069-25mm
<b>Fixing</b>	Forend fixing centres 130mm
<b>A Lock Case</b>	63mm, 76mm
<b>B Backset</b>	45mm, 57mm
<b>C Centres</b>	57mm, 57mm

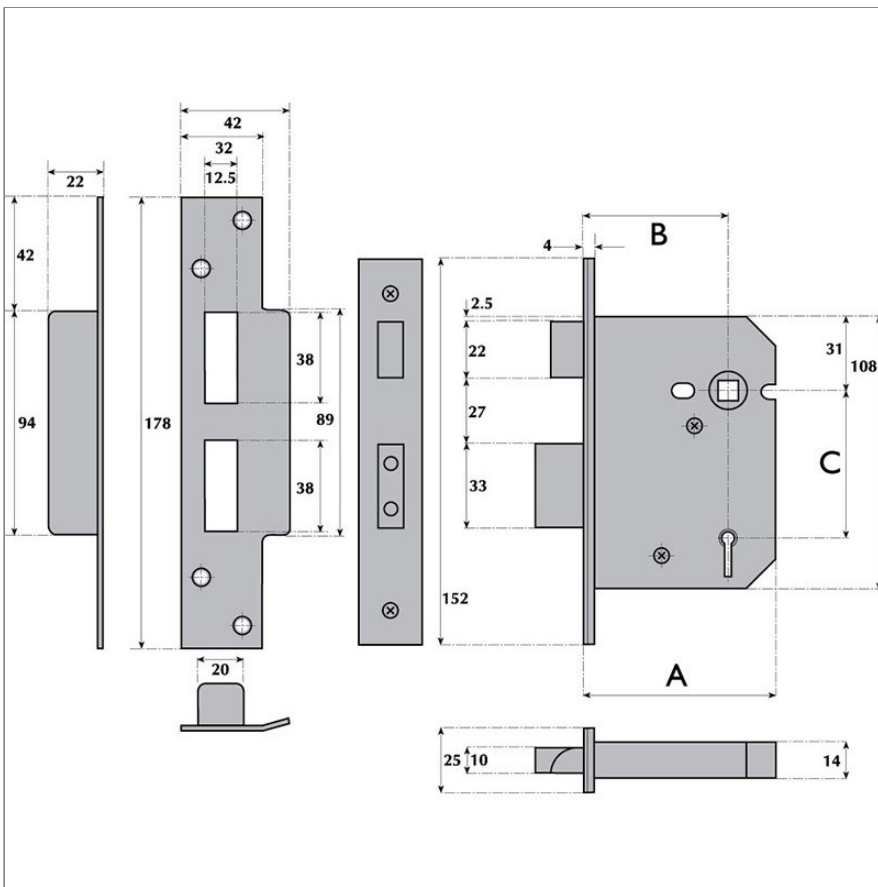

Guardian Lock & Engineering Co Ltd. Imperial Works, Wednesfield Road, Willenhall, West Midlands, WV13 1AL, United Kingdom.

+44(0)1902 635 964 | sales@imperiallocks.co.uk