

SC50045 Lever Mortice Deadlock





Description 5 Lever standard case mortice deadlock for use on external wooden hinged doors providing a high level of security. CE Marked door lock Fire rated to BS EN 1634-1:2000 & Performance rated to BS EN 12209. Deadbolt operated by key from either side. Supplied with 2 keys, striker plate and fixing screws. Finishes stainless steel (SS) or satin brass (SB). Other finishes available. 200 standard differs.

Operation Deadbolt operated by key from either side


Striker Plate Box, Type M

- Deadbolt Brass, with two hardened steel rollers. Throw 16mm
- Differs 200 standard differs numbered 001-200
- Rebate DL/G3051-13mm DL/G3052-19mm DL/G3053-25mm

Units To Suit

A Lock Case 63mm, 76mm, 101mm



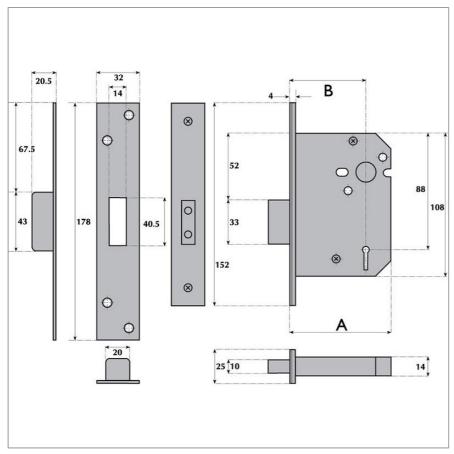

Guardian Lock & Engineering Co Ltd. Imperial Works, Wednesfield Road, Willenhall, West Midlands, WV13 1AL, United Kingdom.

+44(0)1902 635 964 | sales@imperiallocks.co.uk