


G72-7006 Euro-profile cylinder mortise sliding door lock

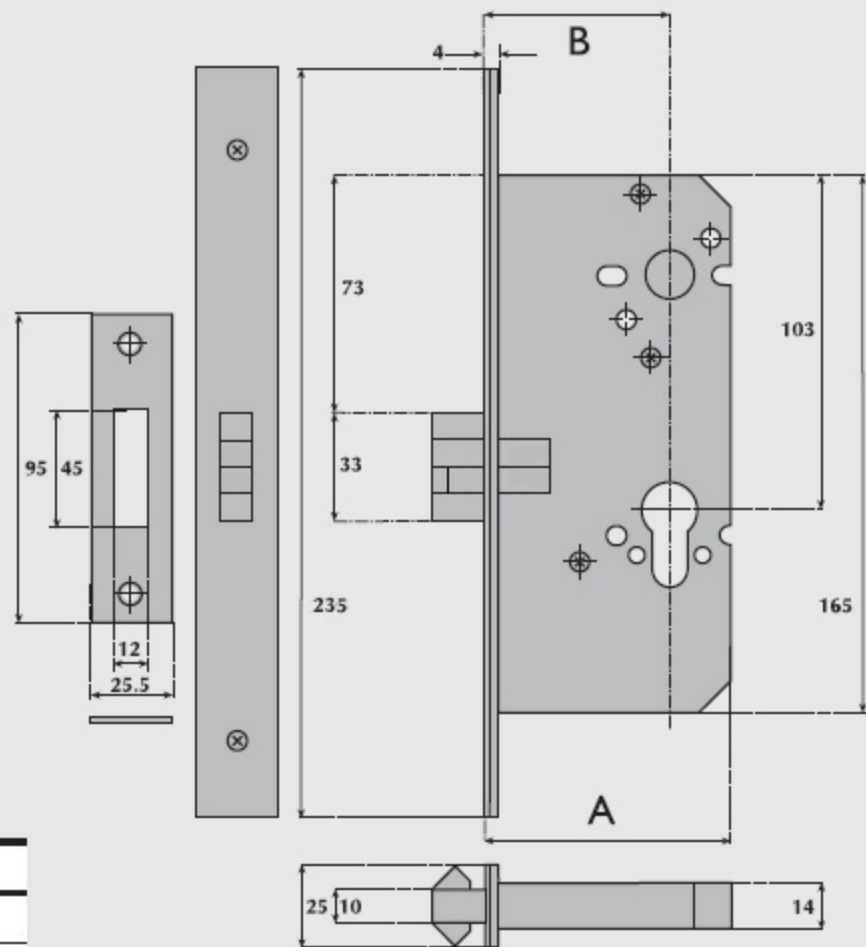

A Lockcase	B Backset	C Centres
76mm	57mm	—
101mm	82mm	—

OPERATION:

Bolt operated by key from either side using a double cylinder or by key outside and thumbturn inside using a single cylinder with turn.

SPECIFICATION:

CASE.

Pierced to accept 20mm and 38mm centre bolt through fixing escutcheons.

STRIKE PLATE.

Type C.

DEADBOLT.

Brass, expanded claw. Throw 14mm.

CYLINDER.

Not supplied. May be used with the following cylinders:

- a) Key either side such as Guardian G9001
- b) Turn inside and key outside such as Guardian G9002.

REBATE UNITS

TO SUIT:

DL/G72-3051-13mm DL/G72-3052-19mm DL/G72-3053-25mm