


G9522 Security letter tidy with integral hood

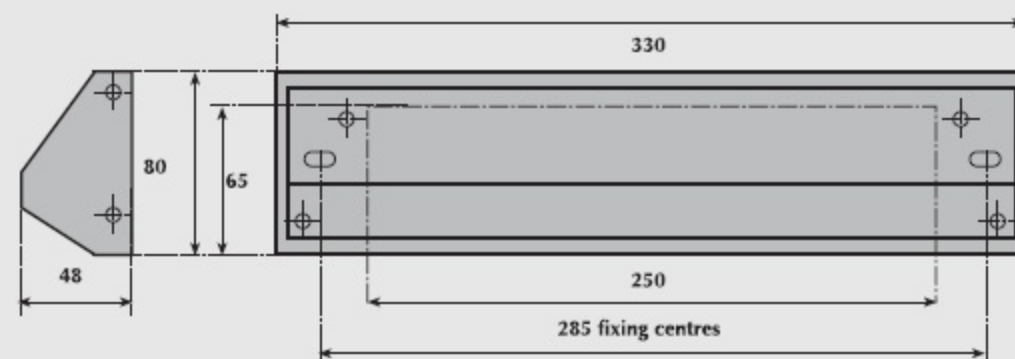

APPLICATION.

For fitting to the inside of wood doors. For use in conjunction with letterplate. Flap opening limited to 60°

SPECIFICATION:

BACKPLATE, FLAP & HOOD.

Steel, epoxy polyester powder coated or electro-plated.

FINISHES.

Silver (SE) or electro-brass (EB).

Other finishes available.

FIXING.

Four wood screws. Pierced to accept bolt through fixing at 285mm centres. Hood fixed with Allen bolts.