
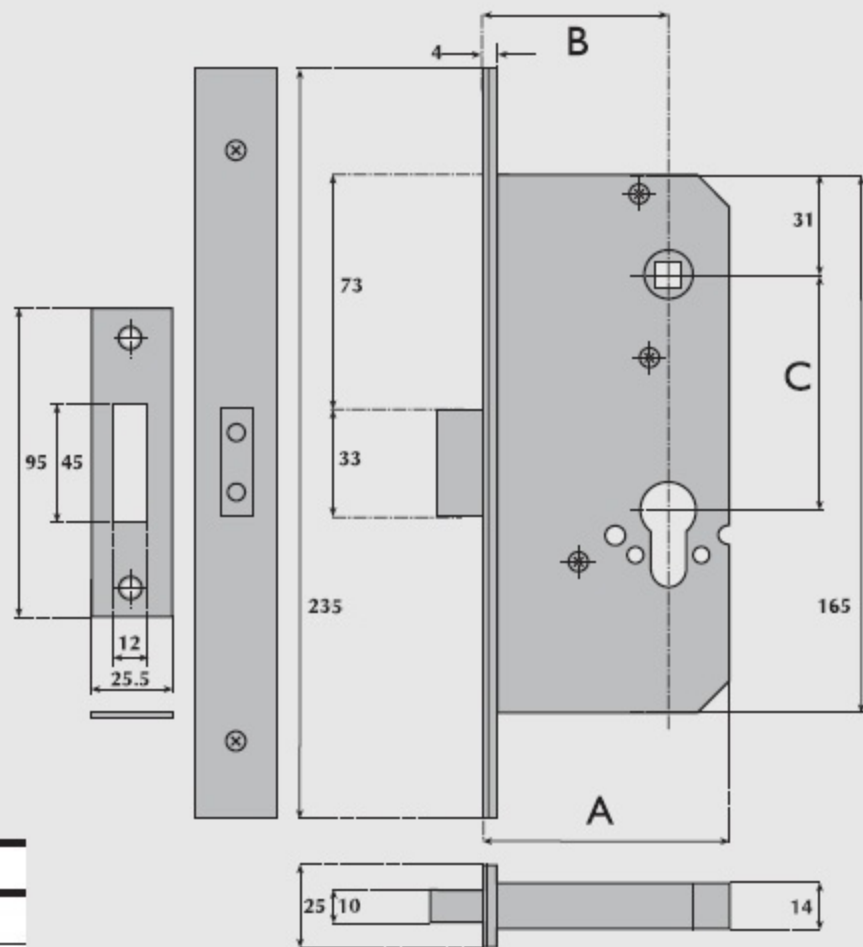


G72-7007 Euro-profile cylinder escape mortice deadlock

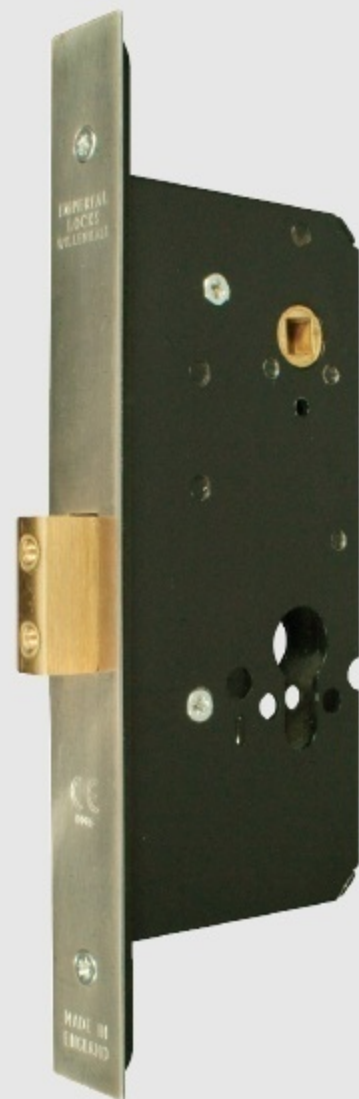

| A Lockcase | B Backset | C Centres |
|------------|-----------|-----------|
| 76mm | 57mm | 72mm |
| 101mm | 82mm | 72mm |

OPERATION:

In standard one-way action, deadbolt thrown or withdrawn by key from outside and withdrawn by lever handle or turn knob from inside using a single cylinder or thrown or withdrawn by key from either side and withdrawn by lever handle or turn knob from inside using a double cylinder. In two-way action, deadbolt may additionally be thrown by lever handle or turn knob from inside.

Use with turn operated cylinders is not recommended.

SPECIFICATION:

- CASE.** Pierced to accept 20mm and 38mm centre bolt through fixing escutcheons.
- STRIKE PLATE.** Type C.
- DEADBOLT.** Brass, with two hardened steel rollers. Throw 13mm.
- FOLLOWER.** Brass, to suit 8mm square spindle. One-way action as standard. Two-way action available on request.
- CYLINDER.** Not supplied. May be used with the following cylinders:
- Key outside such as Guardian G9000
 - Key either side such as Guardian G9001.
- REBATE UNITS TO SUIT:** DL/G72-3051-13mm DL/G72-3052-19mm DL/G72-3053-25mm