


BI172-0 Oval-profile cylinder escape lock - split follower

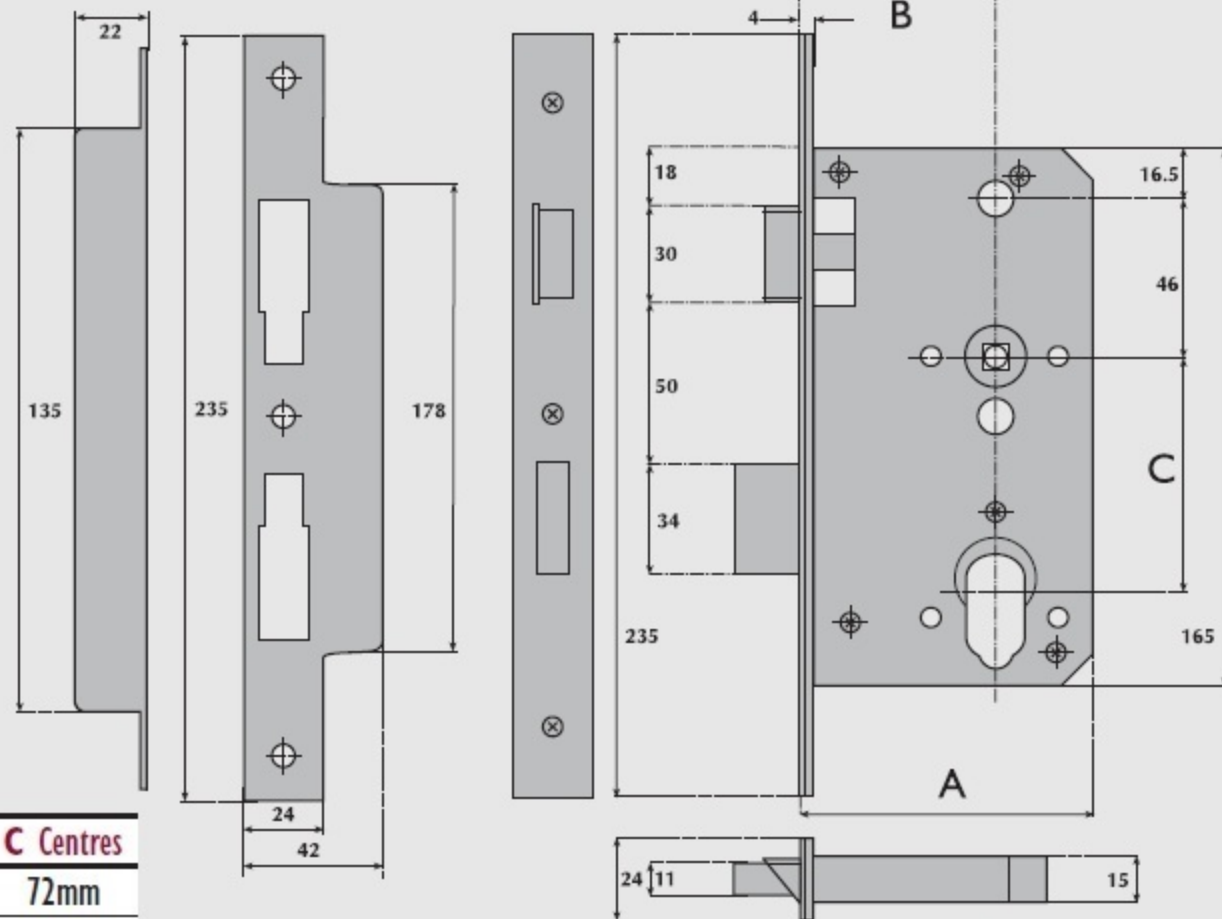

A Lockcase	B Backset	C Centres
90mm	60mm	72mm
110mm	80mm	72mm
130mm	100mm	72mm

OPERATION:

Deadbolt thrown or withdrawn by key from either side and withdrawn by lever handle or turn knob from inside. Latchbolt withdrawn by lever handle from either side. If deadbolt is thrown, inside lever handle will withdraw both latchbolt and deadbolt to ensure quick escape.

SPECIFICATION:

CASE.

Steel, powder coated black, pierced to accept 38mm centre bolt through fixing furniture and 38mm centre bolt through fixing escutcheons.

STRIKE PLATE.

Finished to match forend.

FOREND.

Brass polished, satin or BMA.

Stainless steel, satin or polished.

Available square or radiussed - please specify.

LATCHBOLT.

Brass reversible, zinc plated. Projection 11mm.

HANDING.

Please specify direction of escape.

DEADBOLT.

Brass, zinc plated. Throw 20mm.

FOLLOWER.

Stainless steel split follower to suit 8mm spindle.

Sprung to suit sprung lever handle furniture.

For unsprung lever handle furniture heavy duty springing should be specified.

CYLINDER.

Not supplied. May be used with the following cylinders:

- Key outside.
- Key either side.